

Certificate of constancy of performance

0085-CPR-BU0355

In compliance with the Regulation (EU) No 305/2011 of the European Parliament and of the council of 9 March 2011 (Construction Product Regulation or CPR), this certificate applies to the construction product

NGAS(-MF/FF); 701.150.....000

Safety gas hose line with wall plug

produced by

Haci Ayvaz End. Mamüller San.ve Tic. A.S
Atatürk San.Bolg. Inan Cad. No. 44, TR-34555 Hadimköy / Istanbul

and produced in the manufacturing plants *

Haci Ayvaz End. Mamüller San.ve Tic. A.S
Atatürk San.Bolg. Inan Cad. No. 44
TR-34555 Hadimköy / Istanbul

**) further manufacturer's works on the back !*

This certificate attests that all provisions concerning the assessment and verification of the constancy of the performance described in the Annex ZA of the standard


DIN EN 14800 (Juni 2007)
under System 1

for the performances set out above are applied and that the construction product fulfills all the prescribed requirements for these performances.

This certificate remains valid as long as the test methods and/or the factory production control requirements included in the harmonized standard, used to assess the performance of the declared essential characteristics, do not change, and the construction product, and the manufacturing conditions in the plant are not modified significantly, unless suspended or withdrawn by the product certification body.

The first issue of the certificate was on 21.01.2010

The actual application number is 20-0068-GBR

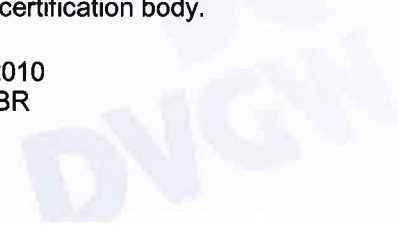

70025-04-1-DE

19.02.2020 Kö A-1/2 *i.H. Kellner*

Date, Issued by, Sheet, Head of Certification Body
 Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

DVGW CERT GmbH is accredited by DAkkS according to DIN EN ISO/IEC 17065:2013 and notified by the government of the Federal Republic of Germany for certification of construction products under EC Regulation No.

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013 akkreditierte und von der Deutschen Bundesregierung benannte Stelle für die Zertifizierung von Bauprodukten im Rahmen der EG-Verordnung Nr. 305/2011



Deutsche
 Akkreditierungsstelle
 D-ZE-16028-01-04

DVGW CERT GmbH
 Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
 53123 Bonn

Tel. +49 228 91 88 - 888
 Fax +49 228 91 88 - 993

www.dvgw-cert.com
 info@dvgw-cert.com

Gas Category <i>Gasart</i>	Remarks <i>Bemerkungen</i>
gases according to DIN EN 437	

Type <i>Typ</i>	Technical Data <i>Technische Daten</i>	Remarks <i>Bemerkungen</i>
NGAS(-MF/FF); 701.150.....000	drain/drop: d0 bending requirements: bestanden tightness: B electrostatic behavior: 0,177 Ohm/m nominal length: 500, 750, 1000, 1250, 1500, 2000 mm nominal diameter: DN 12 smoke formation: s2 temperature resistance: bis 650°C gem. DIN EN 1775:02/2001 für 30 min max. load for allowed strain: 1000 N max. operating pressure: 500 mbar	

Type Variation <i>Ausführungsvariante</i>	Explanations <i>Erläuterungen</i>
NGAS; 701.150.167.000	Connection: 90° bend with swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and swivel nut with internal thread G 1/2 acc. DIN EN 228-1
NGAS-MF; 701.150.151.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and conical thread acc. DIN EN 10226-1 (pic. A.8)
NGAS-FF; 701.150.152.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and thread G 1/2 acc. DIN EN 228-1
NGAS; 701.150.153.000	Connection: Rp 1/2 (pic. A.18) and DN 12 (pic. A.4)
NGAS; 701.150.154.000	Connection: connection plug DN 12 (pic. A.7) and conical thread acc. DIN EN 10226-1 (pic. A.8)
NGAS-MF; 701.150.155.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and conical thread acc. DIN EN 10226-1 (pic. A.8)
NGAS-FF; 701.150.156.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and thread G 1/2 acc. DIN EN 228-1
NGAS; 701.150.157.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) with adapter to internal thread Rc 1/2 and conical thread acc. DIN EN 10226-1 (pic. A.8)
NGAS; 701.150.158.000	Connection: thread Rp 1/2 (pic. A.18) and connection plug DN 12 (pic. A.3)
NGAS; 701.150.159.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and connection plug DN 12 (pic. A.3)
NGAS; 701.150.160.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and thread Rp 1/2 (pic. A.18)
NGAS; 701.150.164.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and thread M 24x1,5
NGAS; 701.150.167.000	Connection: swivel nut G 1/2 acc. DIN EN 228-1 (pic. A.10) and thread G 1/2 acc. DIN EN 228-1, one side fitting bend 90°

Hints of Utilization / Remarks

Verwendungshinweise / Bemerkungen

Relevant test reports:

Type testing: B 12/07/15055 dated 02.07.2012, B 11/01/1317 dated 19.01.2011, B 12/08/1521 dated 16.08.2012, B 13/02/1593 dated 07.06.2013, B 18/11/2821 dated 05.11.2018 DBI, Freiberg

Fire behavior: 2009-B-2529/01; .../02; .../03 dated 29.07.2009, MPA Dresden

Production control: FPC Report No. 30-10549 dated 17.12.2009, SZU Brno, B 13/02/1593 dated 07.06.2013 DBI, Freiberg

Further manufacturer's works:

Weitere Fertigungsstätten

Ayvaz N Ltd.
84 Ahinora str.
BG-7400 Isperih

